

New mechanism of X-ray radiation from a relativistic charged particle in a dielectric random medium

Zh.S. Gevorkian^{1,2*}, C.P. Chen^{1†}, and Chin-Kun Hu¹

1) *Institute of Physics, Academia Sinica, Nankang, Taipei 11529, Taiwan*

2) *Yerevan Physics Institute and Institute of Radiophysics and Electronics 378410, Ashtarak-2, Armenia*

(February 7, 2008)

Abstract

We have considered X-ray radiation of a relativistic charged particle moving in a system consisting of microspheres distributed randomly in a dielectric material. A new mechanism based on the diffusional scattering of pseudophotons is suggested. The result leads to a stronger dependence of radiation intensity on the particle energy, $\gamma = E/mc^2$, than that predicted by the traditional transition radiation theory, and explains a recent experiment on such a system of randomly distributed superconducting granules.

PACS number : 41.60.-m, 61.80.Cb, 85.25.-j

*E-mail: gevorg@stp1.phys.sinica.edu.tw

†Corresponding author, E-mail: cpchen@phys.sinica.edu.tw

Radiation of charged particles in randomly inhomogeneous media is a problem of current interests. One of the applications is to utilize this as a detector to determine the energy of a relativistic charged particle since radiation of this nature strongly depends on the particle energy, γ . The feature of γ dependence makes the detection sensitivity increase as the particle energy goes up. The currently existing detectors, such as ionization chamber, Cerenkov detector etc., measure the particle energy by measuring the velocity, $\beta = v/c$. This loses the sensitivity since in the relativistic regime, β approaches 1.

One type of the cryogenic detectors is qualified to belong to the category of random system. It is consisting of type-I superconducting microspheres randomly distributed in dielectric material such as wax or varnish etc. In the H-T phase diagram, there is a superheated superconducting region above the critical transition line. It is a metastable state in which the superconducting state persists under the condition that no external nucleation disturbances exist even if it goes across the critical transition line from the superconducting to the normal state region. The critical field which confines the superheating state is the superheating field, H_{sh} . The superconducting microsphere in the superheating state will undergo irreversible phase transition to the normal state if an external energy exceeding the transition threshold energy is deposited on the grain. By detecting the grain transition signal, one can actually detect the energy deposited on the grain. For a detail description on the superconducting granule device, see, for example, the references listed in [1].

Recently, Yuan et al carried out an experiment utilizing the type of detector as described above to investigate the X-ray radiation from a relativistic charged particle passing through the detector [2]. The detector is consisting of superconducting Sn microspheres randomly distributed in paraffin wax to form a cylindrical bar of 0.3 cm in diameter and 1.2 cm in length. The microsphere is 35 μm in diameter. The experimental result shows that the number of grain transitions, hence the number of X-ray photons emitted, is proportional to γ .

By the conventional Transition Radiation (TR) theory [3], the charged particle will emit photons when passing across the interface. One can calculate the radiation intensity or the number spectrum of photons emitted by summing the contributions from the interfaces. This method of calculation takes each local interface effect into account as commonly applied in the conventional thin foil TR detector. According to the TR theory, the intensity emitted is linearly proportional to γ , while the number of photons generated, proportional to $\ln(\gamma)$, see for example, reference [4].

Here, we explain the result of the experiment carried out by Yuan et al. based on the diffusional scattering of pseudophotons. The idea is to view the electromagnetic field associated with a moving charged particle as a collection of pseudophotons. When the charged particle moves in a medium of inhomogeneous dielectric property, the pseudophoton can be scattered to become real photon and detected in an experiment. From this point of view, the cause of the radiation is not confined to the local interface where the charged particle passes, as described in the TR theory, but, instead, resulting from the neighbouring region next to the particle trajectory with inhomogeneous dielectric constant. This makes the radiation a global effect rather than a local one.

The number of pseudophotons associated with the moving charged particle is estimated as follows,

$$N_{ps} \sim \int \frac{d\vec{q}}{(2\pi)^3} A^2(\vec{q}) \quad , \quad (1)$$

where $\vec{A}(\vec{q})$ is the vector potential of the electric field created by the moving charge. The Maxwell's equation for this vector potential has the form,

$$\nabla^2 \vec{A} + \frac{\epsilon\omega^2}{c^2} \vec{A} = -\frac{4\pi}{c} \vec{j}(\vec{r}, \omega) \quad , \quad (2)$$

where

$$\vec{j}(\vec{r}, \omega) = \frac{e\vec{v}}{v} \delta(x) \delta(y) e^{i\omega z/v} \quad , \quad (3)$$

is the current of a charged particle moving uniformly in the z-direction with velocity v , and ϵ is the average dielectric constant of the system, see below for the details. From the symmetry of the problem, it follows that the vector potential is directed along the z-direction, $A_i = A_{zi}$. Then, the Eq. (2) is easily solved to have the solution,

$$A(\vec{q}) = \frac{-8\pi^2 e}{c} \frac{\delta(q_z - \omega/v)}{k^2 - q^2} \quad , \quad (4)$$

where $k = \omega\sqrt{\epsilon}/c$ is the wavenumber of the pseudophotons.

By substituting Eq. (4) into Eq. (1), and replacing $\delta(0)$ by $L_z/2\pi$ to take into account the finite size of the system, one obtains

$$N_{ps}(\omega) \sim \frac{e^2}{c} \gamma_m^2 L_z \quad , \quad (5)$$

where $\gamma_m = (1 - \beta^2\epsilon)^{-1/2}$ is the Lorentz factor in the medium in which we believe that $v\sqrt{\epsilon} < c$ is always the case, and L_z is the length of the system.

A simple sketch of the superconducting granule detector is presented in Fig. 1. The pseudophoton field is moving together with the charged particle as plotted. Once the charged particle along with the pseudophotons enter the system, they experience the variation of the dielectric constant introduced by the grains distributed in the wax and show scattering effect. Since the pseudophoton is moving along the z direction and in the X-ray region under consideration, the wave length is much smaller than the grain diameter, $\lambda \ll a$, the pseudophoton experiences the randomness in the moving direction without the effect resulting from the transverse direction. The randomness of the dielectric constant as seen by the pseudophoton is therefore of the same nature for the granular system as for the system of plates of thickness a oriented perpendicular to the moving direction of the charge. The only difference is that the plate thickness a is uni-size, while there is a distribution in the path length of the pseudophoton when traversing the granule. This introduces further randomness which does not modify the result qualitatively. So, we can describe the superconducting granule system by the model system consisting of a homogeneous medium with dielectric constant $\epsilon_0(\omega)$ in which parallel plates of thickness a and dielectric constant $\epsilon_p(\omega)$ are randomly spaced in the z-direction. This is a system with dielectric constant of 1-D randomness as proposed by Gevorkian [5]. When a charged particle moves in such a system in the z-direction, the surrounding pseudophoton scatters from the inhomogeneity

of the dielectric constant and is converted into a real photon. Scattering of this kind is characterized by the scattering mean free path in the z-direction, which is related to the randomness of the media via the correlation function of the dielectric constant. Under the condition of Born approximation, $ka|\sqrt{\epsilon_p/\epsilon_0} - 1| \ll 1$, the mean free path is estimated as

$$l(\omega) = \frac{4c^2}{na^2(\epsilon_p - \epsilon_0)^2\omega^2} \quad , \quad (6)$$

where n is the concentration of plates in the z-direction, ϵ_p and ϵ_0 are the dielectric constants for the plate and the homogeneous medium respectively.

The multiple scattering occurs under the condition that $\lambda \ll l(\lambda) \ll L$, $l_{in}(\lambda)$. L is the characteristic dimension of the system and l_{in} is the inelastic mean free path of pseudophoton. This condition leads to the diffusion of pseudophoton in the z-direction. The radiation intensity in the diffusion scattering region, integrated over the angles, is estimated as follows,

$$I(\omega) \sim N_{ps} \frac{1}{l(\omega)} \frac{L^2}{l^2(\omega)} \quad . \quad (7)$$

It is proportional to the number of pseudophotons, N_{ps} , the probability of pseudophoton scattering, $1/l(\omega)$, and the mean number of scatterings in the random medium, L^2/l^2 . By substituting Eq. (5), the radiation intensity in Eq. (7) becomes,

$$I(\omega) \sim \frac{e^2}{c} \gamma_m^2 \frac{L_z}{l(\omega)} \frac{L^2}{l^2(\omega)} \quad . \quad (8)$$

In the emission of X-ray, the plasma formula for the dielectric constant applies.

$$\begin{aligned} \epsilon_p(\omega) &\approx 1 - \frac{\omega_p^2}{\omega^2} \quad , \\ \epsilon_0(\omega) &\approx 1 - \frac{\omega_{p0}^2}{\omega^2} \quad , \end{aligned} \quad (9)$$

where ω_p is the plasma frequency of the plate, and ω_{p0} , of the homogeneous medium. The average dielectric constant of the system, $\epsilon = \epsilon_0 + na(\epsilon_p - \epsilon_0)$, then becomes,

$$\epsilon(\omega) \approx 1 - \frac{(1 - na)\omega_{p0}^2 + (na)\omega_p^2}{\omega^2} \quad , \quad (10)$$

and the Lorentz factor in the medium has the following form accordingly,

$$\gamma_m = \gamma \left(1 + \frac{\omega_c^2}{\omega^2} \right)^{-1/2} \quad . \quad (11)$$

In the above equation, one defines the characteristic frequency

$$\omega_c = \gamma \sqrt{(na)\omega_p^2 + (1 - na)\omega_{p0}^2} \quad . \quad (12)$$

This characteristic frequency is a result of the overall dielectric inhomogeneity and the particle energy, γ . Substituting the plasma formulae, Eq. (9), into the condition of Born approximation, one obtains,

$$\omega \gg \frac{a(\omega_p^2 - \omega_{p0}^2)}{2c} \equiv \omega_b \quad . \quad (13)$$

The elastic mean free path of the pseudophoton, then, takes the form,

$$l(\omega) \approx \frac{1}{n} \left(\frac{\omega}{\omega_b} \right)^2 \quad . \quad (14)$$

The characteristic frequency, ω_b , is related to the plate thickness and the dielectric property across the boundary of the plate surface.

Weak absorption of pseudophotons can be taken into account in similarity to the case of wave propagation [6]. The electromagnetic field, or the pseudophoton, can be absorbed by the random medium. In the weak absorption limit, the elastic mean free path is much smaller than the inelastic one, $l \ll l_{in}(\omega)$. Under diffusion propagation of pseudophotons, the quantity $\sqrt{l \cdot l_{in}}$, instead of L , becomes the effective size of the system provided that $\sqrt{l \cdot l_{in}} \leq L$, [6]. Therefore, the radiation intensity becomes,

$$I(\omega) \sim \frac{e^2}{c} \frac{\gamma^2}{\left(1 + \frac{\omega_c^2}{\omega^2}\right)} \frac{L_z l_{in}(\omega)}{l^2(\omega)} \quad . \quad (15)$$

The ratio, l_{in}/l , is the mean number of pseudophoton scatterings before the absorption. The inelastic mean free path of pseudophoton in the X-ray region is determined by the absorption mainly via photoelectric effect,

$$l_{in}^{-1}(\omega) = (1 - na)N_0\sigma_{ph}^0(\omega) + (na)N_p\sigma_{ph}^p(\omega) \quad , \quad (16)$$

where N_0 and N_p are the atom numbers in unit volume of the homogeneous medium and of the plate respectively. $\sigma_{ph}^0(\omega)$ and $\sigma_{ph}^p(\omega)$ are the corresponding photoelectric cross sections.

The frequency dependence of the radiation intensity in different frequency regimes is derived as follows. In the region, $\omega_b \ll \omega \ll \omega_L$ (where ω_L is the frequency at which the effective size equals the system characteristic size, $\sqrt{l(\omega_L) \cdot l_{in}(\omega_L)} = L$), the absorption of the pseudophoton determines the effective size of the system. Therefore, taking into account that in this region the photoabsorption cross section is hydrogen-like, $\sigma_{ph}(\omega) \sim \omega^{-3.5}$, we obtain the frequency dependence of radiation intensity, $I(\omega)$, and the number of photon emitted from the detector, $N(\omega) = I(\omega)/\hbar\omega$, from Eqs. (15) and (16),

$$I(\omega) \sim \frac{e^2}{c} \gamma^2 \frac{\omega^{-1/2}}{1 + \frac{\omega_c^2}{\omega^2}} \quad , \quad (17)$$

and

$$N(\omega) \sim \alpha \gamma^2 \frac{\omega^{-3/2}}{1 + \frac{\omega_c^2}{\omega^2}} \quad . \quad (18)$$

For $\omega > \omega_L$, the diffusion trajectory is cut on the system characteristic size. We have the formula for $I(\omega)$ and $N(\omega)$ in this frequency range as,

$$I(\omega) \sim \frac{e^2}{c} \gamma^2 \frac{\omega^{-6}}{1 + \frac{\omega^2}{\omega_L^2}} \quad , \quad (19)$$

and

$$N(\omega) \sim \alpha \gamma^2 \frac{\omega^{-7}}{1 + \frac{\omega^2}{\omega_L^2}} \quad . \quad (20)$$

where $\alpha = e^2/\hbar c$ is the fine structure constant.

From the above equations, by integrating over frequencies and taking into account that $\omega_c \propto \gamma$, one obtains the energy dependence of the total radiation intensity, $I_T(\gamma)$, and the total number of emitted photons, $N_T(\gamma)$, coming out of the pseudophoton field in the following two frequency ranges.

For $\omega_c < \omega_L$,

$$\begin{aligned} I_T(\gamma) &\sim \gamma^{2.5} \quad , \\ N_T(\gamma) &\sim \gamma^{1.5} \quad . \end{aligned} \quad (21)$$

For $\omega_c > \omega_L$, the radiation reaches the saturation region,

$$\begin{aligned} I_T(\gamma) &\sim \text{Constant} \quad , \\ N_T(\gamma) &\sim \text{Constant} \quad . \end{aligned} \quad (22)$$

Since the frequency, ω_L , is a signature which marks that the effective size of the system under diffusional propagation of pseudophoton equals the system size, the radiation intensity of the charged particle is saturated once the pseudophoton field is cut by the system size spatially. The saturation region is therefore determined by the system size L^2 and the particle energy, γ . From $l(\omega_L) \cdot l_{in}(\omega_L) = L^2$, together with $l_{in}(\omega_L) \propto \omega_L^{3.5}$ and $l(\omega_L) \propto \omega_L^2$, we have $\omega_L \propto L^{4/11}$.

In formulae (21) and (22), we have found the energy dependence of the emitted radiation intensity and the number of emitted photons. On the other hand, in the experiment [2], the number of absorbed photons is measured. These two are related to each other if we consider the photon emitted from the pseudophoton field as well as the photon absorbed by the system at the same time. Since the effective linear size of the system is $\sqrt{l \cdot l_{in}}$, there exist many such subsystems in the medium along the path of moving electron in the z-direction. After real photons are formed with a spatial extent of $\sqrt{l \cdot l_{in}}$, they propagate through the rest of the system with part of them absorbed by the system. Under the condition of weak absorption, the number of real photons absorbed is proportional to the total number of real photons and the absorption probability of a diffusing photon determined by $\sqrt{l \cdot l_{in}}/l_{in}$ in a system of effective size $\sqrt{l \cdot l_{in}}$. Therefore, one can evaluate the total number of absorbed photons as,

$$N_{ab} \leq \int_{\omega_b}^{\omega_c} d\omega \left[\frac{l(\omega)}{l_{in}(\omega)} \right]^{1/2} N_T(\omega) \quad . \quad (23)$$

By taking into account the frequency dependence of ω_c , $l(\omega)$, $l_{in}(\omega)$, and $N_T(\omega)$, we obtain from Eq. (23), $N_{ab} \sim \gamma^x$, with $x \geq 3/4$. Also, from Eq. (21), the upper limit of the exponent is 1.5. So, the number of grain transitions has a γ dependence to the power within the bound $0.75 \leq x \leq 1.5$. This puts the experimental result [2] within this bound.

We now estimate some of the quantities obtained in the above equation for the system of the cryogenic detector used in the experiment by Yuan et al [2]. The volumetric filling factor of 13 % for the Sn grains mixed in the wax corresponds to $n \sim 130 \text{ cm}^{-1}$. By identifying the grain diameter as the plate thickness in the above model, $a \sim 35 \mu\text{m}$, one has $na \sim 0.46$. The characteristic size of the system is roughly 0.3 cm, which is the diameter of the detector cylinder in this case. Using $\omega_p \sim 50 \text{ eV}$ for Sn and $\omega_{p0} \sim 20 \text{ eV}$ for wax, we have $\omega_b \sim 120 \text{ KeV}$ and $\omega_c \sim (37\text{eV})\gamma$ which ranges from 74 to 740 KeV corresponding to the beam energy from 1 to 10 GeV. From the characteristic frequency above, one can estimate the elastic mean free path in the frequency range of interests, which is about a few hundred KeV. Indeed, with the frequency below ω_L , which is estimated to be a few hundred KeV, the elastic mean free path, $l(\omega)$, is from 0.02 up to 0.3 cm corresponding to photon energy from 200 to 800 KeV. If we calculate $\sqrt{l \cdot l_{in}}$ from the elastic mean free path, l , obtained above together with the l_{in} calculated from the mass energy absorption coefficient [8], we obtain the effective size of the system being from 0.1 cm to the order of 1 cm within this energy range. This is about the size of the characteristic dimension of the system. So, we have $\sqrt{l \cdot l_{in}} \sim L$. This puts the detector system under consideration in the right range for description by the diffusional emission mechanism, and the result gives a correct trend on the response of the detector subject to the beam test in terms of grain transition.

In conclusion, we have suggested a new mechanism of X-ray radiation from a relativistic charged particle moving in a random medium based on the multiple scattering of electromagnetic field (pseudophoton). Strong energy dependence of the number of superheated superconducting grains proceeding the phase transition to the normal state, observed in the experiment [2], is a manifestation of this radiation mechanism. Experiment on the radiation from the system of randomly spaced plates has been performed by Detoef et al [7]. However, the radiation investigated is in the region of soft X-ray from 6 to 12 KeV, which is out of the region valid for diffusional scattering because the absorption is strong so that $l(\lambda) \ll l_{in}(\lambda)$ is not satisfied. For the future experiment to provide more evidences on the diffusional mechanism of X-ray radiation, we propose criteria for the diffusional region, $\lambda \ll l \ll L, l_{in}$. The X-ray radiation is greatly enhanced in this region. A detector working on this would then have a promising application in measuring the energy, γ , of an extremely relativistic charged particle.

This work was supported in part by the National Science Council of the Republic of China (Taiwan) under contract No. NSC 89-2112-M-001-005.

REFERENCES

- [1] K.P. Pretzl, Particle World 1, 153 (1990),
M. Furlan and K. Schmiemann, NIM A374, 413 (1996),
K. Schmiemann and M. Furlan, NIM A377, 18 (1996)
- [2] L.C.L. Yuan and C.P. Chen et al., "A novel transition radiation detector utilizing superconducting microspheres for measuring the energy of relativistic high energy charged particle", to be published in NIM A (1999).
- [3] G.M. Garibian, Zh. Teor. Eksp. Fiz., 37, 527 (1959),
J. Oostens et al, Phys. Rev. Lett. 19, 541 (1967),
L.C.L. Yuan et al, Phys. Lett. 31B, 60 (1970)
- [4] M.L. Ter-Mikaelian, "High-Energy Electromagnetic Processes in Condensed Media" (Wiley, New York, 1972)
- [5] Zh. S. Gevorkian, Phys. Rev. E 57, 2338 (1998)
- [6] P.W. Anderson, Phil. Mag. 52, 505 (1985)
- [7] J.F. Detoeuf et al, NIM A265, 157 (1988)
- [8] S.M. Seltzer, Rad. Res. 136, 147 (1993)

FIGURES

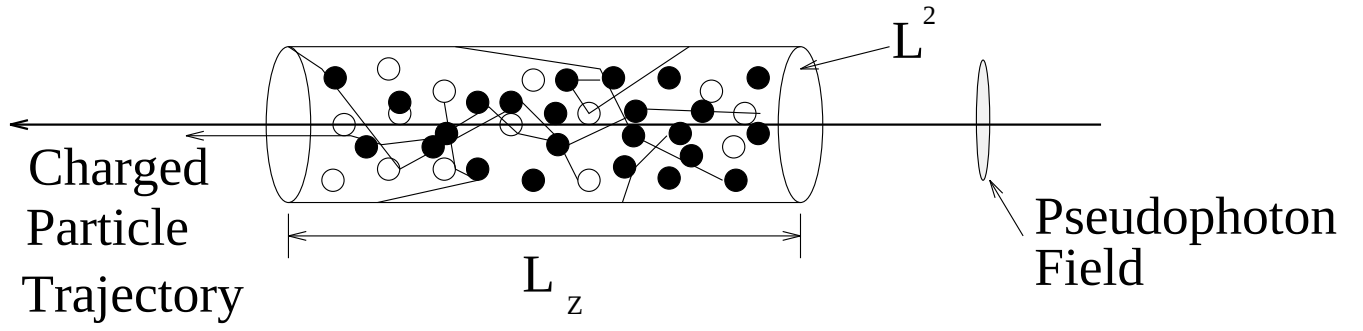


FIG. 1. Superconducting granule detector. Solid circles represent the Sn grains in superheating state, while the open ones, for those in normal state. The grain diameter is a . Trajectories for the scattered pseudophotons are plotted